



REVISIONS	
ISS	DESCRIPTION \ DATE

RoHS COMPLIANT

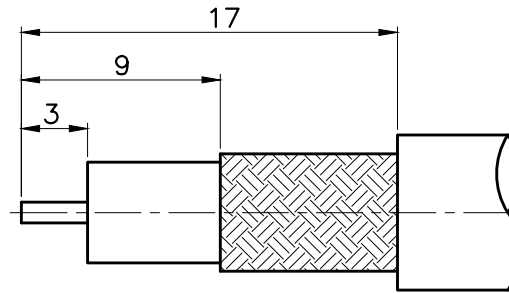

RECOMMENDED
CABLE STRIPPING DIM'S

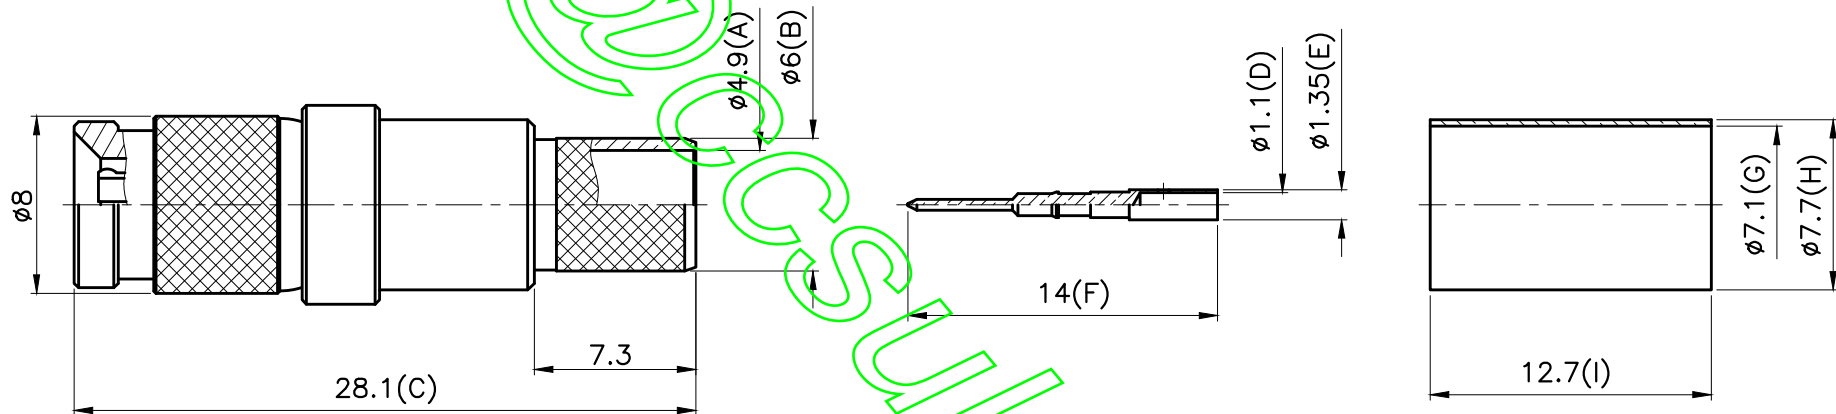

1. CRIMPED FERRULE
HEX CRIMP SIZE .262"
2. CRIMPED CONTACT PIN
SQ CRIMP SIZE .042"

CONNECTORS CABLES



SPECIALISTS LTD.

APRD:	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 >6-30 = ±0.4 >30-120 = ±0.6 >120-315 = ±1 >315-1000 = ±1.6 ANGLES = ±5°	FERRULE	BRASS	NICKEL
CHKD:		CONTACT PIN	BRASS	GOLD
DR:		BODY	BRASS	NICKEL
		BODY	BRASS	NICKEL
		INSULATOR	TEFLON	WHITE
		BODY	PHOSPHOR BRONZE	GOLD
		WASHER	BERYLLIUM COPPER	NICKEL
		SHELL	BRASS	NICKEL
		NO. DESCRIPTION	MATERIAL	FINISH

TITLE: 1.0/2.3 MALE CRIMP (75 ohm)
(FOR 1694A)

PART NO: . 1.02.3PCR1694

DRAWING NO:

DATE: 05/23/14"

UNIT: mm

SHEET: .

SCALE: 3/1

ISO 9001 certificate