


RF Coaxial Fixed Attenuator, 2W, 6G, SMA Connector

Product Features

- Wide Frequency Band DC-6GHz
- Low VSWR
- Low Attenuation Accuracy
- Widely used for In-building Solutions

Mechanical Drawing (Unit:mm)

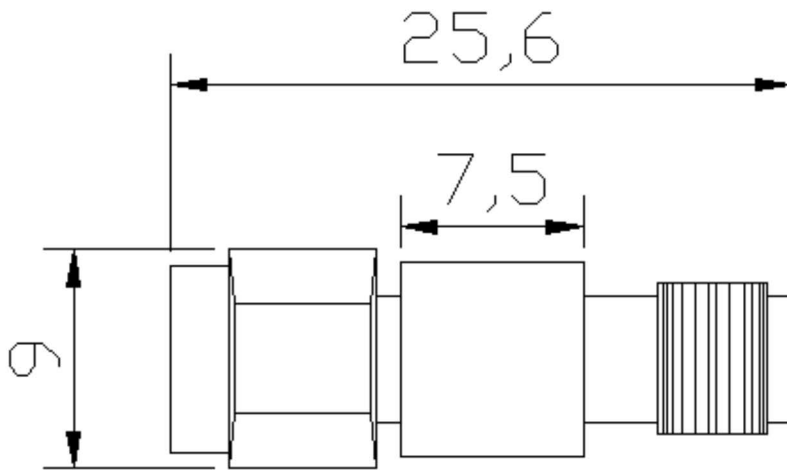

TECHNICAL SPECIFICATION

Item No.	AT-2W6G-SMAMF					
Attenuation (dB)	1	3	6	10	20	30
Accuracy (dB)	±0.5	±0.5	±0.8	±0.6	±0.8	±0.8
Frequency (GHz)	DC-6 GHz					
Average Power (W)	2 W					
VSWR	≤1.2					
Connector	SMA-M (in) to SMA-F (out)					
Impedance (Ω)	50					
Temp (°C)	-20°C~+70°C					
Packing	1 pc per box					