

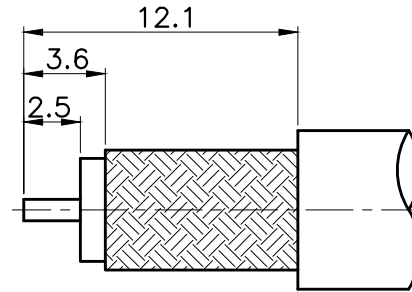


REVISIONS		
ISS	DESCRIPTION	DATE

RoHS COMPLIANT

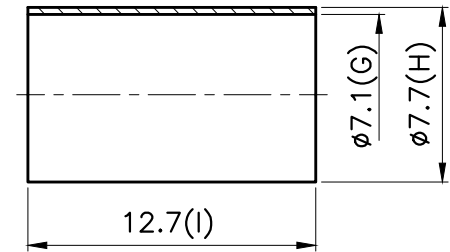

RECOMMENDED
CABLE STRIPPING DIM'S

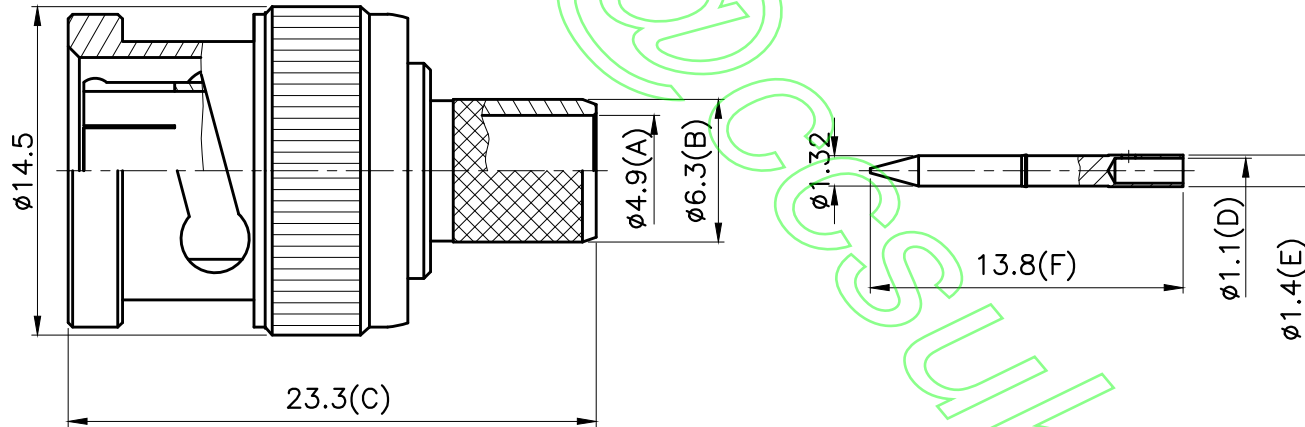

1. CRIMPED FERRULE
HEX CRIMP SIZE .262"
2. CRIMPED CONTACT PIN
SQ CRIMP SIZE .042" OR SOLDER

CONNECTORS CABLES



SPECIALISTS LTD.

TITLE: BNC MALE CRIMP(75 ohms)
(FOR 1694A)

PART NO: BPCR1694AHD

DR. NO:

APRD:

CHKD:

DR:

DATE: 11/23/11"

SHEET: .

UNLESS OTHERWISE
SPECIFIED TOLERANCES

0.5-6 = ±0.2
>6-30 = ±0.4
>30-120 = ±0.6
>120-315 = ±1
>315-1000 = ±1.6
ANGLES = ±5°

UNIT: mm

SCALE: 3/1

NO.	DESCRIPTION	MATERIAL	FINISH
	FERRULE	BRASS	STEEL
	CONTACT PIN	BRASS	GOLD
	SHELL	ZINC ALLOY	NICKEL
	GASKET	RUBBER	RED
	C RING	STELL	NICKEL
	SPRING	SK5	NICKEL
	WASHER	STELL	NICKEL
	INSULATOR	TEFLON	WHITE
	BODY	BRASS	NICKEL