
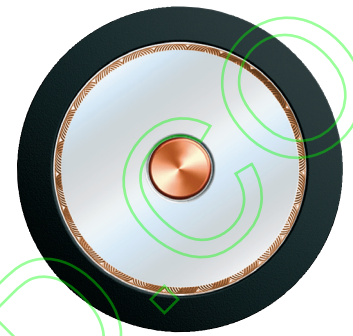


URM43 50 Ω Type 65% Braid PVC

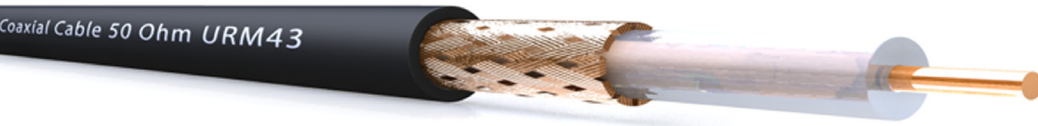

Cable Construction		Electrical Characteristics	
Inner Conductor	Solid bare copper, 1/0.9 \pm 0.018mm	Mean characteristic impedance	50 \pm 2 Ohm
Dielectric	Solid Polyethylene, \emptyset 2.95 \pm 0.15mm	Conductor resistance at 20°C	< 3.25 Ohm/100M
Braid	Bare copper braid, 0.12(\pm 0.008)x64	Min. Insulation resistance at 20°C	> 200 MOhm*M
Braid coverage	65 %	Rated voltage	30 V
Outer Jacket	PVC, Black, \emptyset 5.0 \pm 0.20mm	Rated temperature	80°C