

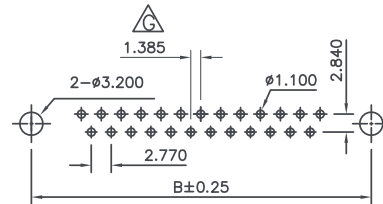

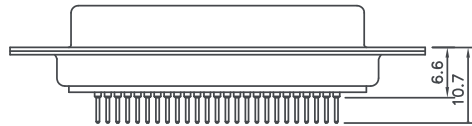



50 POSITIONS

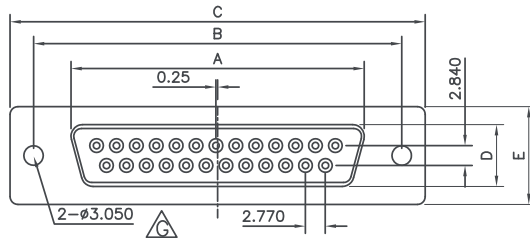

P.C. Board Layout  
(9,15,25,37 Positions)

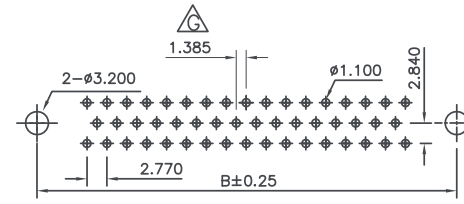

P.C. Board Layout  
(50 Positions)



## SPECIFICATION

Current Rating :	3A AC/DC
Voltage Rating :	250V AC/DC
Temperature Range :	-40°C to +85°C
Contact Resistance :	30mΩ max.
Insulation Resistance :	5000MΩ min.
Withstand Voltage :	1000V AC/ 1 Minute
Materials	
Insulator :	PBT, UL94V-0
Insulator Colour :	White
Contact :	Brass
Shell :	Selective Gold Plated Steel, Spcc Metal Iron with Nickel Plated

Pos	A	B	C	D	E
9	16.33	24.99	30.81	7.90	12.55
15	24.66	33.32	39.14	7.90	12.55
25	38.38	47.04	53.04	7.90	12.55
37	54.84	63.50	69.32	7.90	12.55
50	52.43	61.11	66.93	10.74	15.37



RoHS Compliant

## Taicom TDxxFPS

Title : D-SUB Standard Dip PCB Stamp Pin Female

Tolerance (Unless Specified) :

.x = ±0.30  
.xx = ±0.25  
.xxx = ±0.15

Dim : (mm)

Angle :