


Gas Discharge Lightning Arrester, N Male to N Female (Bulkhead)

CLAG-NMFB-3G-G07

Drawing: (mm)

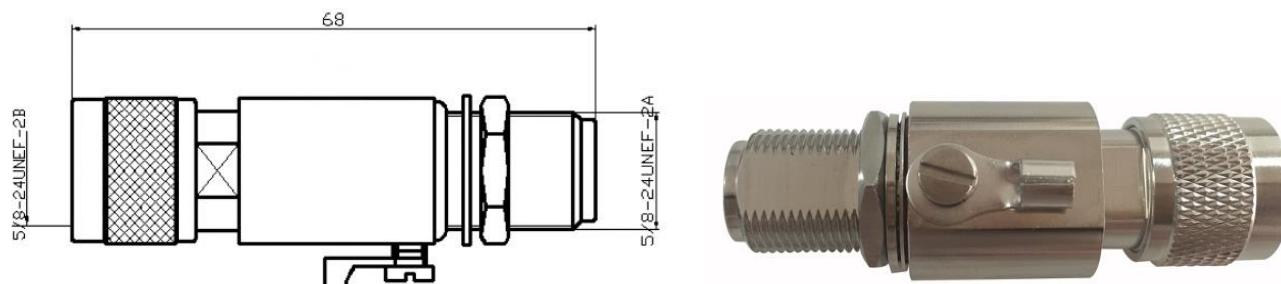

TECHNICAL SPECIFICATIONS

Electrical Data	
Impedance	50 Ohm
Frequency Range	DC-3 GHz
VSWR	≤ 1.20
Insulation Resistance	≥ 1x10 ⁴ MΩ
Insertion Loss	≤0.2 dB
Withstand Voltage AC	4000V 1min no breakdown and no arcing phenomenon
Center contact resistance	≤ 0.4 m Ω
Outer contact resistance	≤ 0.2 m Ω
Rated Power	200 W
Initial Discharge Voltage	230 V
Peak Discharge Voltage	1000 V(1×40μS)
Peak Discharge Current	20 KA
Temperature range	-40°C~+85°C
Material and Plating	
Body	Brass / Ni plating
Insulator	PTFE
Center conductor	Tin Phosphor bronze / Au plating