
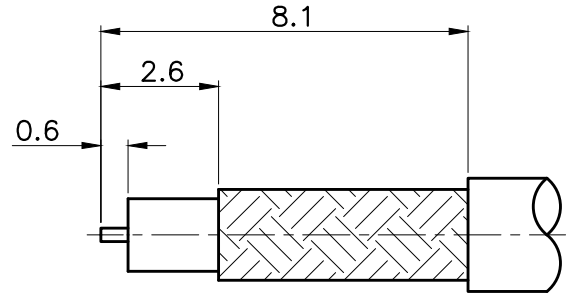
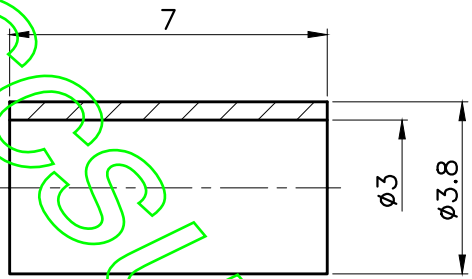


REVISIONS		
ISS	DESCRIPTION	DATE

RoHS COMPLIANT

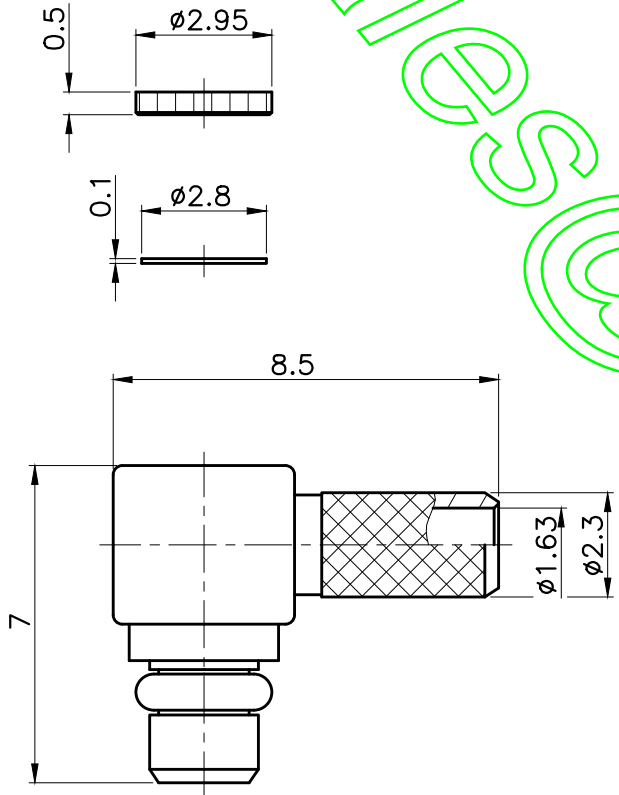

CABLE STRIPPING DIM'S

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER



TITLE: MMCX MALE R/A CRIMP  
(FOR RG174/U, RG316/U)

PART NO: MMCXPRACS174

DRAWING NO:

APRD:	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 >6-30 = ±0.4 >30-120 = ±0.6 >120-315 = ±1 >315-1000 = ±1.6 ANGLES = ±5°	FERRULE	BRASS	GOLD
CHKD:		CONTACT PIN	BRASS	GOLD
DR:		C RING	BERYLLIUM COPPER	GOLD
DATE: 06/14/12"	UNIT: mm	INSULATOR	TEFLON	WHITE
SHEET: .	SCALE: 6/1	BODY	BRASS	GOLD
		INSULATOR COVER	DELTRIN	WHITE
		COVER	BRASS	GOLD
		NO. DESCRIPTION	MATERIAL	FINISH