

4.3-10 Male Connector for 3/8" Coaxial Cable, Straight, Silicone Rubber sealing

Radio Frequency Systems line of high performance coaxial cable connectors are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up the attachment of connectors to CELLFLEX® coaxial cables. RFS connectors are fully tested for mechanical and electrical compliance specifications. They are available in all popular cable sizes in a variety of mating interfaces. The 4.3-10 connector is an innovative, space-saving RF connection meeting all requirements even under the most severe environmental conditions and not relying on coupling nut torque.



FEATURES / BENEFITS

- **Waterproof** - The only totally waterproof connector in the industry. Compliant with IP68 water immersion testing. Press fit contact/bead O-ring keeps out moisture and prevents vacuum build-up and air exchange due to temperature swings.
- **Solderless** - Captivated spring finger contacts permit quick, easy and precise solderless installation utilizing only basic hand tools. Avoids the potential high impedance risk associated with traditional soldering.
- **Self Flaring** - Self flaring design reduces installation time and thus, saves on labor costs.
- **Corrosion-Proof Plated Contacts** - Featured even on standard connectors. Provide improved contact resistance and lower intermodulation.
- **Outstanding Electrical Performance** - Metal to Metal contact between cable and connector - no plastic parts used. Secure connection highly resistant to pull-off or twist-off provides long-term mechanical integrity. Resistant to intermodulation after temperature cycling.
- **Easy to Install** - No special tools needed. Only basic hand tools required. No additional costs to the installer.

Technical Features

GENERAL SPECIFICATIONS

Transmission Line Type		Coaxial Cable
Cable Size		3/8"
Cable Type		Foam Dielectric Superflexible
Model Series		SCF38-50 Series
Connector Interface		4.3-10
Connector Type		Straight
Sealing Method		Silicone Rubber
Gender		Male

ELECTRICAL SPECIFICATIONS

Nominal Impedance	Ohm	50
Maximum Frequency	GHz	6
VSWR, Return Loss	VSWR (dB)	DC < f ≤ 1.0 GHz: 1.02 (40.0) 1.0 < f ≤ 2.7 GHz: 1.03 (37.0) 2.7 < f ≤ 3.8 GHz: 1.08 (28.3) 3.8 < f ≤ 6 GHz: 1.14 (23.7)

MECHANICAL SPECIFICATIONS

Plating Outer/Inner		Silver/Silver
Length	mm (in)	45.5 (1.8)
Outer Diameter	mm (in)	25.2 (1)
Weight	kg (lb)	0.095 (0.21)
Inner Contact Attachment		Basket
Outer Contact Attachment		360° clamping


ACCESSORIES

Wrench size front	mm (in)	17
Wrench size rear	mm (in)	19
Trimming Tool		TRIM-SET-S38-D01

TESTING AND ENVIRONMENTAL

Waterproof Level		IP68
------------------	--	------

4.3-10 Male Connector for 3/8" Coaxial Cable, Straight, Silicone Rubber sealing

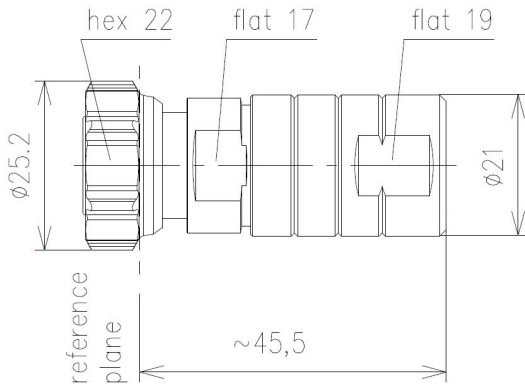

all dimensions in millimeter

43M-SCF38-D02_Drawing

External Document Links

Installation Instruction M30783 SCF38

Notes