


REVISIONS	
ISS	DESCRIPTION\DATE

RoHS COMPLIANT

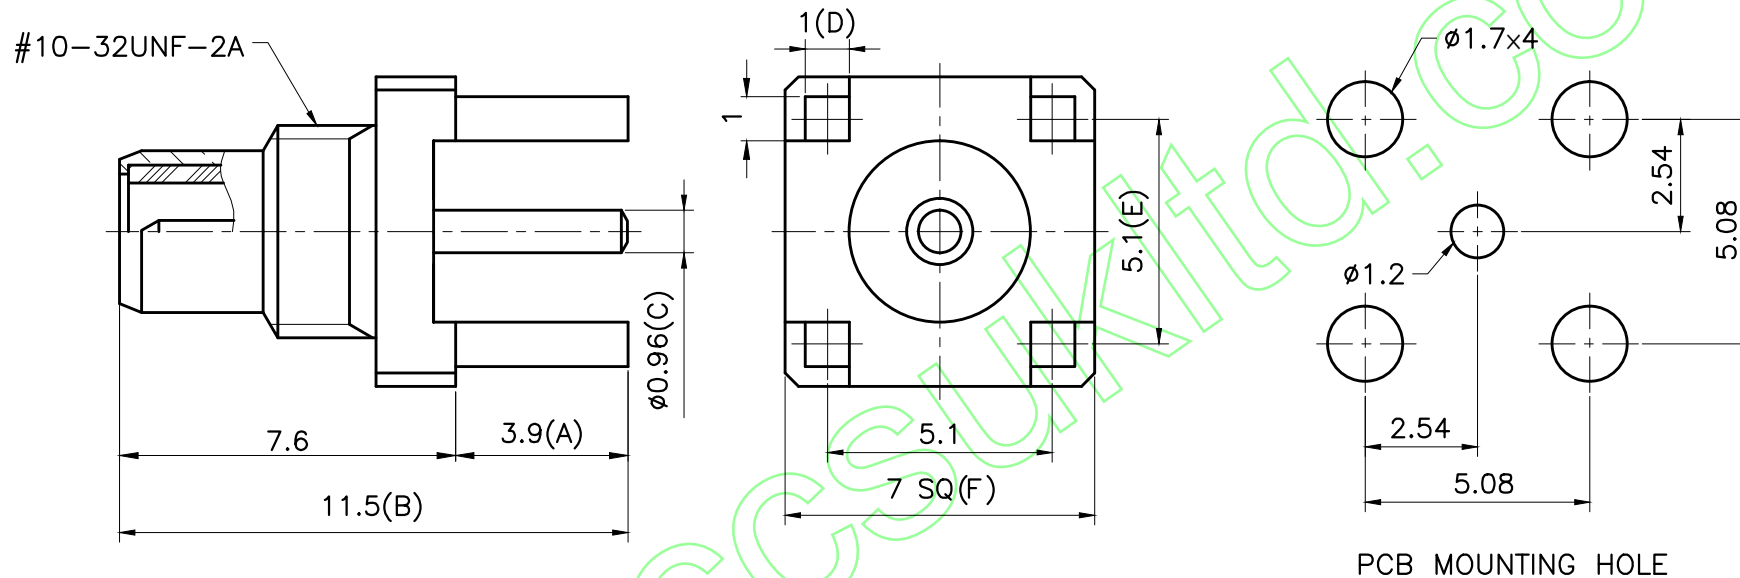

PCB MOUNTING HOLE

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468

CONNECTORS CABLES



SPECIALISTS LTD.

TITLE: SMC FEMALE(MALE CONTACT PIN)
PCB MOUNT

PART NO: SMCJPCB50

DRAWING NO:

037

APRD:	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 >6-30 = ±0.4 >30-120 = ±0.6 >120-315 = ±1 >315-1000 = ±1.6 ANGLES = ±5°			
CHKD:				
DR:				
DATE: 03/10/16"	UNIT: mm	CONTACT PIN	NOTE 1	NOTE 3
SHEET: .	SCALE: 6/1	INSULATOR	NOTE 4	WHITE
		BODY	NOTE 1	NOTE 2
		NO. DESCRIPTION	MATERIAL	FINISH