


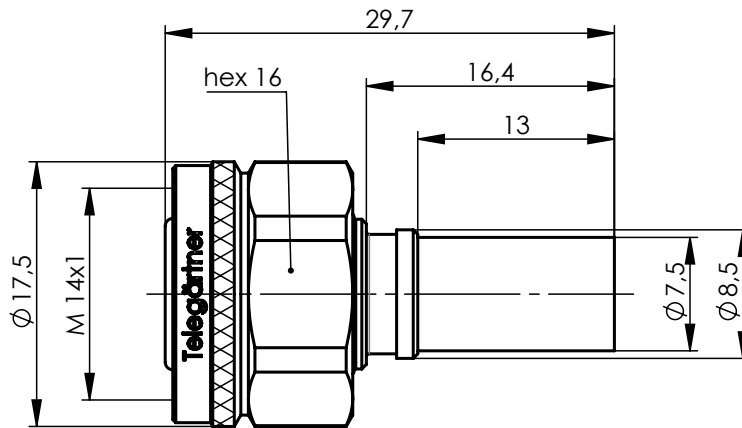

Mechanical characteristics

cables

interface dimensions acc. to assembly code
center conductor
outer conductor
mating life
coupling torque

Components

center contact
outer contact
other metal parts
insulator
gasket

Electrical characteristics

impedance
frequency
return loss
voltage proof
insulation resistance
contact resistance
center contact
outer contact

Environmental

operating temp.
mating face sealing (plugged)
RoHS compliant

Mechanische Eigenschaften

Kabel

Steckgesicht nach Montageanleitung
Innenleiter
Außenleiter
Steckzyklen
Kupplungsdrehmoment

Bauteile

Innenkontakt
Außenkontakt
sonstige Metallteile
Isolierung
Dichtung

Elektrische Eigenschaften

Wellenwiderstand
Frequenz
Rückflusssdämpfung
Prüfspannung
Isolationswiderstand
Durchgangswiderstand
Innenkontakt
Außenkontakt

Umgebung

Betriebstemperatur
Querdichtigkeit (gesteckt)
RoHS konform

G30 (1.5/3.8): 02YS(ST)CY 1.4/3.7-50 LI, 1.4/3.8 AF, 7808A, CNT-240, HPF 240, LMR-240, MRC 240 AFB, S 041172 D, SPEEDFOAM 240, TZC 500 25, WCX240

G54 (1.5/3.8 Flex): H 155, LOW LOSS 1.4/3.8, MRC 240 FLEX

2.2-5

A31

crimp

crimp

>100

3 Nm

Materials / Material

CuZn39Pb3

CuZn39Pb3

CuZn39Pb3

PTFE

silicone /Silikon

Finish / Oberfläche

Cu2Ag5

Cu2Ag3

CuSnZn3

50 Ω

0-6 GHz

typ.: 1GHz-38dB; 3GHz-36dB; 6GHz-30dB

1,2 kV_{eff} / 50 Hz

≥ 1 GΩ

≤ 2 mΩ


≤ 1 mΩ

-30°C / +70°C

IP 68 (IEC 60529)

2011/65/EU

M 1:1



Änd./ rev. index	Änderungs-Nr. / revision code	Datum/ date	Name/ name	Datum/ date	Name/ name	Gewicht/ weight [g]
			gez./ drawn	06.09.2018	HB	
			gepr./ appr.	10.09.2018	KL	ca./approx. 18,9
			Maßstab/ scale 2:1 (1:1)	Benennung/ title 2.2-5 Straight Plug, Screw 2.2-5 Kabelstecker, Screw		
			untel. Maße/ dim. without tolerances according to	Untert./ doc. type K	Zeichnungsnr./ drawing no. J01460A0010	
				Ersatz für/ replaces		