

order number: J01150A0071

SMA Angle Plug Crimp G8 (RD-316)

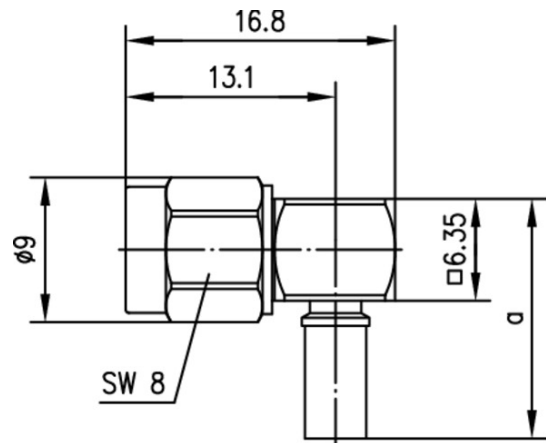


Fig. may differ

Technical Attributes	
Cable group; cable	G8 (RD-316) RD-316 G 02232 D HF 50 0.5/1.5 LDY K 02252 D
Remarks	>33 dB/1 GHz; 28.5 dB/2 GHz; 25 dB/4GHz
Finish	Gold
Dimensions	a=14.9
Assembly	C0414
Crimp die	N01003A0014

Description of the Series/Product Category

Notice: The following information refer to the series/product category as a whole. Please see the specific datasheet for specific technical information of a particular product.

The SMA series is a very popular coax connector with threaded coupling, and can be used up to frequencies of over 18 GHz (depending on type). The impedance is controlled at 50 Ω. Connector styles are available for flexible, conformable and semi-rigid cable types. Versions of the SMA connector are available for mounting to

printed circuit boards using both through-hole soldered and through-hole press-fit techniques, as well as surface mount ty...

Mating face sealing for SMA connectors between plug and jack (mated) according to IP 68. This classification is a general statement for the relevant series. Individual connectors may deviate from the values shown. If in doubt, please consult our engineers.

Mechanical Characteristics	
Durability (Steckungen)	≥ 500
Recommended coupling torque	79 - 113 Ncm
Material: spring contacts	CuBe2
Material: crimp ferrule	Cu
Material: serrated lock washer	CuSn6
Material: insulators	PTFE
Material: gaskets	MVQ
Finish: Inner conductor	Cu1Ni2Au1.27
Finish outer conductor: Gold (standard; last digit ...1)	NiPAu
Finish outer conductor: MIL gold (last digit ...2)	Cu1Ni2Au1.27
Finish outer conductor: Stainless Steel (last digit ...6)	passivated
Finish outer conductor: Type for printed circuits (last digit ...7)	SnPb8
Finish outer conductor: Telealloy (white bronze) (last digit ...8)	CuSnZn3 (Telealloy); Ag2CuSnZn0.5 (Optargen)
Finish outer conductor: Nickel (last digit ...9)	Cu2Ni5
Finish other metal parts: Gold (standard; last digit ...1)	Cu2Ni5Au0.2
Finish other metal parts: MIL gold (last digit ...2)	Cu1Ni2Au0.8
Finish other metal parts: Stainless steel (MIL type; last digit ...6)	passivated
Finish other metal parts: Telealloy (white bronze) (last digit ...8)	CuSnZn3
Finish other metal parts: Nickel (last digit ...9)	Cu2Ni5

Climatic Characteristics	
Climatic category acc. to IEC 60068 - 1	55/155/56

Electrical Characteristics	
Impedance	50 Ω
Voltage proof	1 kV/50 Hz
Working voltage	\leq 335 V/50 Hz
Contact resistance inner conductor	\leq 3 m Ω
Contact resistance outer conductor	\leq 2 m Ω
Insulation resistance	\geq 5 G Ω
Frequency range for flexible cable up to	12,4 GHz
Frequency range for semi-rigid cable up to (Straight style)	18 GHz
Frequency range for semi-rigid cable up to (Angle style)	12,4 GHz
Return loss flexible cable (straight and angle style) at 1 GHz	\geq 20.00 dB
Return loss flexible cable (straight and angle style) at 2 GHz	\geq 19.20 dB
Return loss flexible cable (straight and angle style) at 4 GHz	\geq 17.70 dB
Return loss flexible cable (straight and angle style) at 6 GHz	\geq 16.50 dB
Return loss semi-rigid cable (straight style) at 1 GHz	\geq 28.50 dB
Return loss semi-rigid cable (straight style) at 2 GHz	\geq 27.50 dB
Return loss semi-rigid cable (straight style) at 4 GHz	\geq 26.00 dB
Return loss semi-rigid cable (straight style) at 6 GHz	\geq 24.90 dB
Return loss semi-rigid cable (angle style) at 1 GHz	\geq 25.70 dB
Return loss semi-rigid cable (angle style) at	\geq 25.20 dB

2 GHz	
Return loss semi-rigid cable (angle style) at 4 GHz	≥ 24.20 dB
Return loss semi-rigid cable (angle style) at 6 GHz	≥ 23.20 dB

Standards
IEC 60 169-15