



REVISIONS	
ISS	DESCRIPTION\DATE

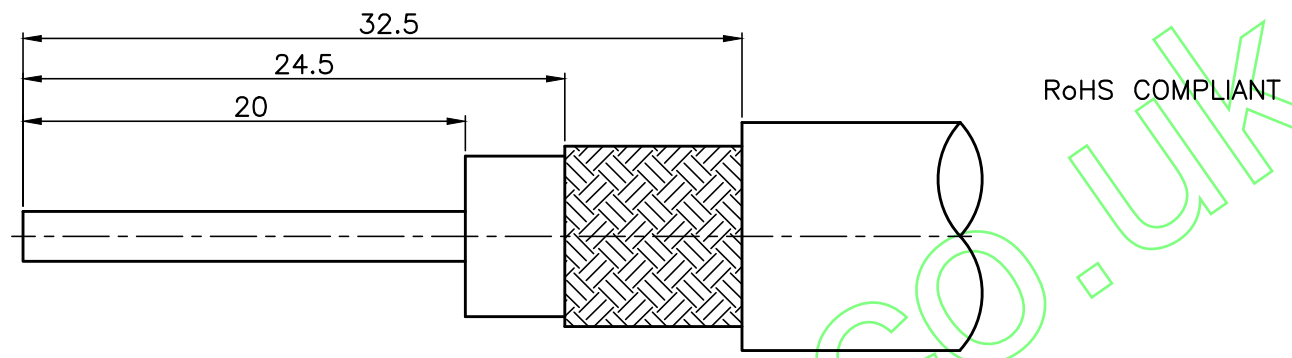

RoHS COMPLIANT

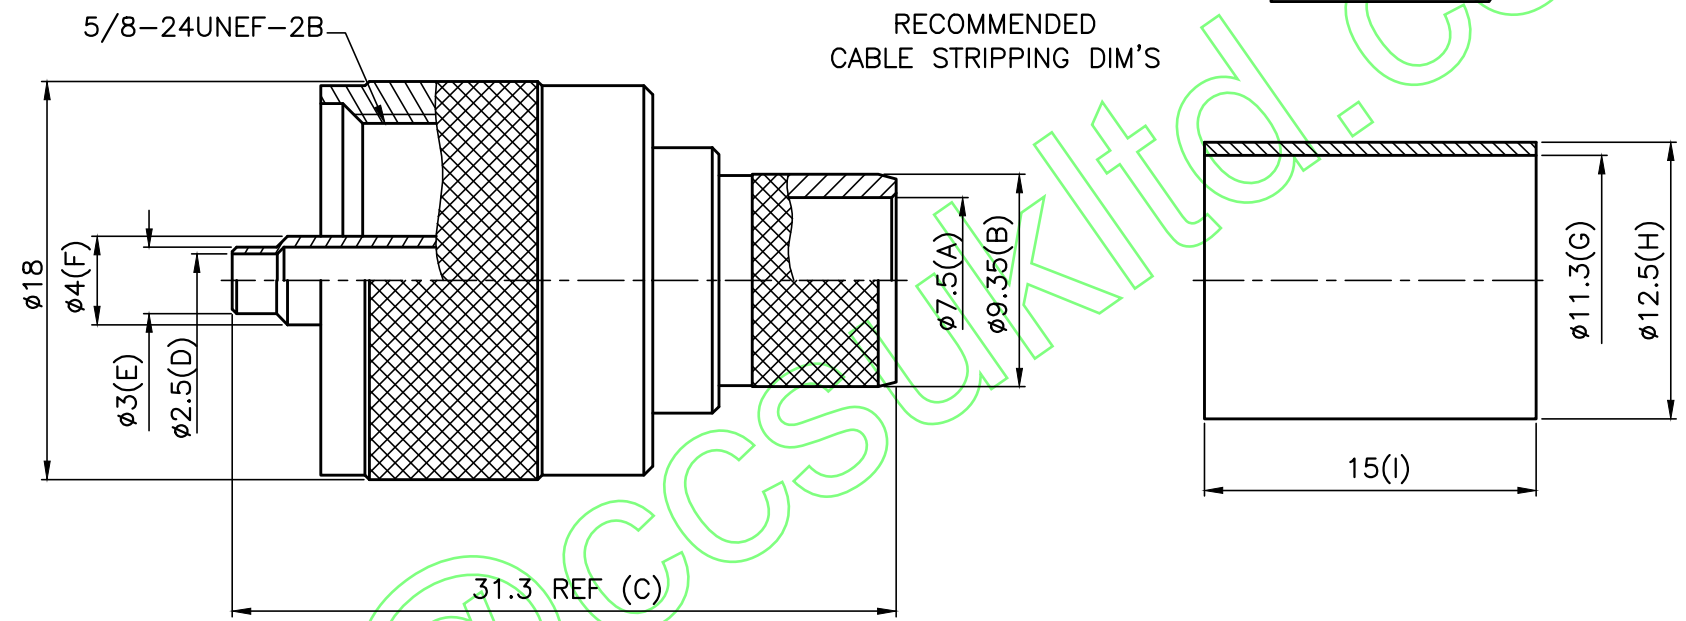

RECOMMENDED
CABLE STRIPPING DIM'S

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CONTACT PIN TO SOLDER



TITLE: UHF CRIMP PLUG
(FOR RG214/U)

PART NO: UPCR214

DRAWING NO:

030

APRD:	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 >6-30 = ±0.4 >30-120 = ±0.6 >120-315 = ±1 >315-1000 = ±1.6 ANGLES = ±5°			
CHKD:		FERRULE	BRASS	NICKEL
DR:		SHELL	BRASS	NICKEL
DATE: 01/19/17"	UNIT: mm	CONTACT PIN	BRASS	GLOD
SHEET: .	SCALE: 3/1	INSULATOR	DELIN	YELLOW
		BODY	BRASS	NICKEL
		NO. DESCRIPTION	MATERIAL	FINISH