




ISS	DESCRIPTION \ DATE

REVISIONS


RoHS COMPLIANT

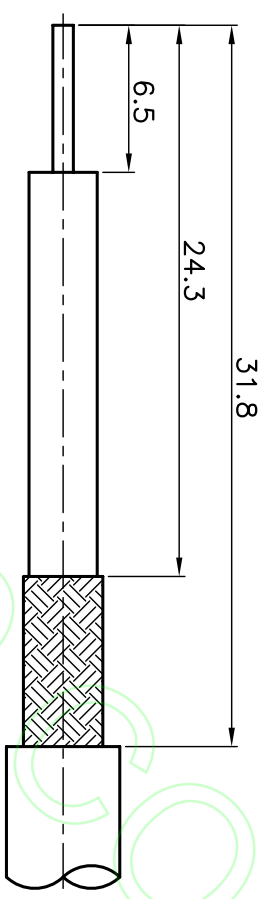

5/8-24UNEF-2B
RECOMMENDED
CABLE STRIPPING DIM'S

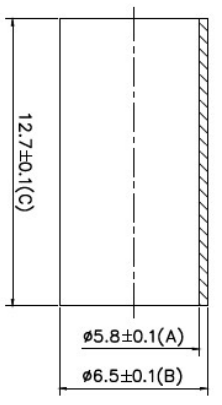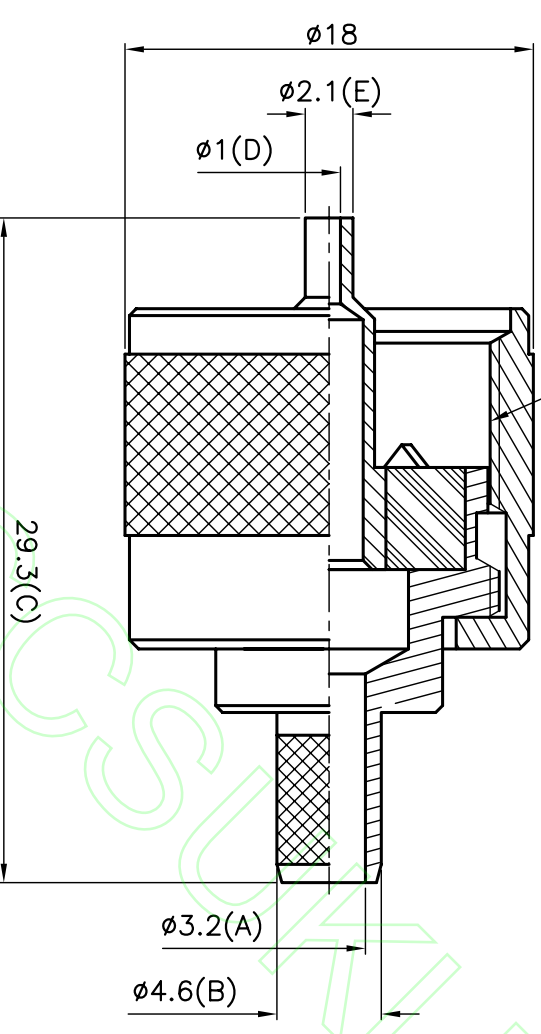

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" OR SOLDER



TITLE: UHF CRIMP PLUG
FOR RG223

PART NO: UPCR223
DRAWING NO: 030

APRD:	UNLESS OTHERWISE SPECIFIED TOLERANCES
CHKD:	0.5-6 = ±0.2
DR:	>6-30 = ±0.4
	>30-120 = ±0.6
	>120-315 = ±1.0
	>315-1000 = ±1.6
	ANGLES = ±5°

DATE: 09/08/09"
SHEET: .
UNIT: mm
SCALE: 3/1

NO.	DESCRIPTION	MATERIAL	FINISH
	FERRULE	BRASS	NICKEL
	SHELL	BRASS	NICKEL
	CONTACT PIN	BRASS	GLOD
	INSULATOR	DELIRIN	WHITE
	BODY	BRASS	NICKEL
		MATERIAL	FINISH