



ISS	REVISIONS	DESCRIPTION \ DATE

31.8

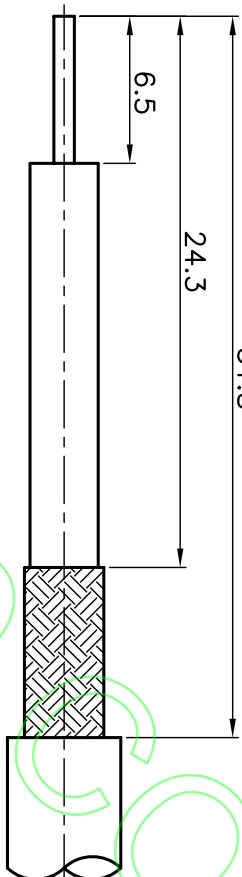


RoHS COMPLIANT

5/8-24UNEF-2B

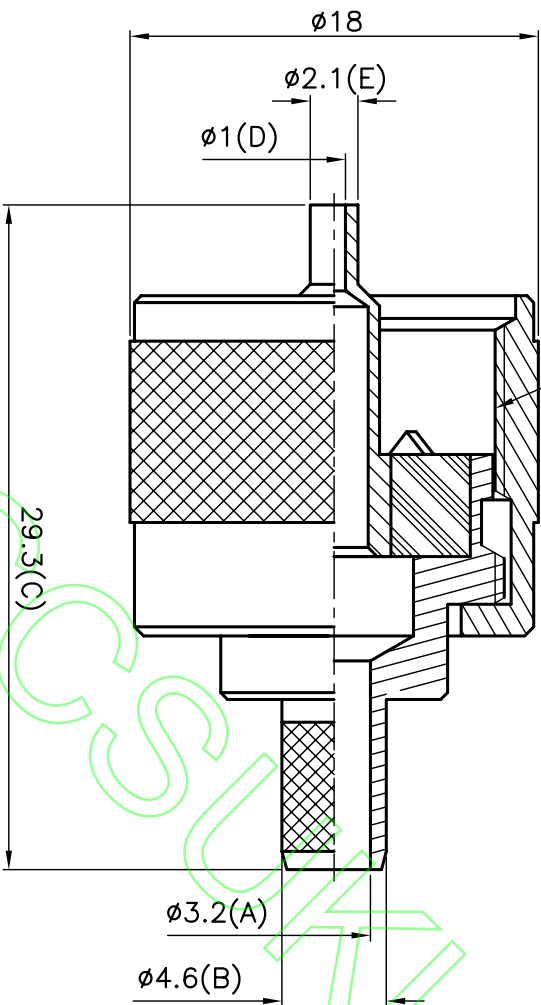

RECOMMENDED
CABLE STRIPPING DIM'S

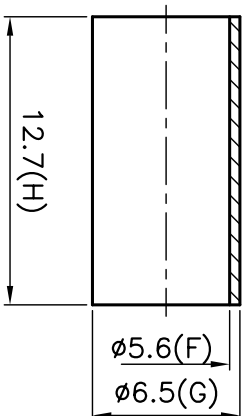

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" OR SOLDER

CONNECTORS CABLES
CHES
SPECIALISTS LTD.

TITLE: UHF CRIMP PLUG
(FOR RG58/U)

PART NO: UPCR58
DRAWING NO:

APRD:

CHKD:

DR:

DATE: 09/08/09"

030

SHEET: .

SCALE: 3/1

NO. DESCRIPTION

MATERIAL

FINISH

UNLESS OTHERWISE
SPECIFIED TOLERANCES

0.5-6 = ± 0.2
>6-30 = ± 0.4
>30-120 = ± 0.6
>120-315 = ± 1
>315-1000 = ± 1.6
ANGLES = $\pm 5^\circ$

FERRULE

SHELL

CONTACT PIN

INSULATOR

BODY

BRASS

NICKEL

FERRULE

SHELL

CONTACT PIN

INSULATOR

BRASS

NICKEL

CONTACT PIN

INSULATOR

BRASS

DELIRIN

BRASS

WHITE

BODY

INSULATOR

BRASS

DELIRIN

BRASS

NICKEL