


ISS	REVISIONS
	DESCRIPTION \ DATE

RoHS COMPLIANT

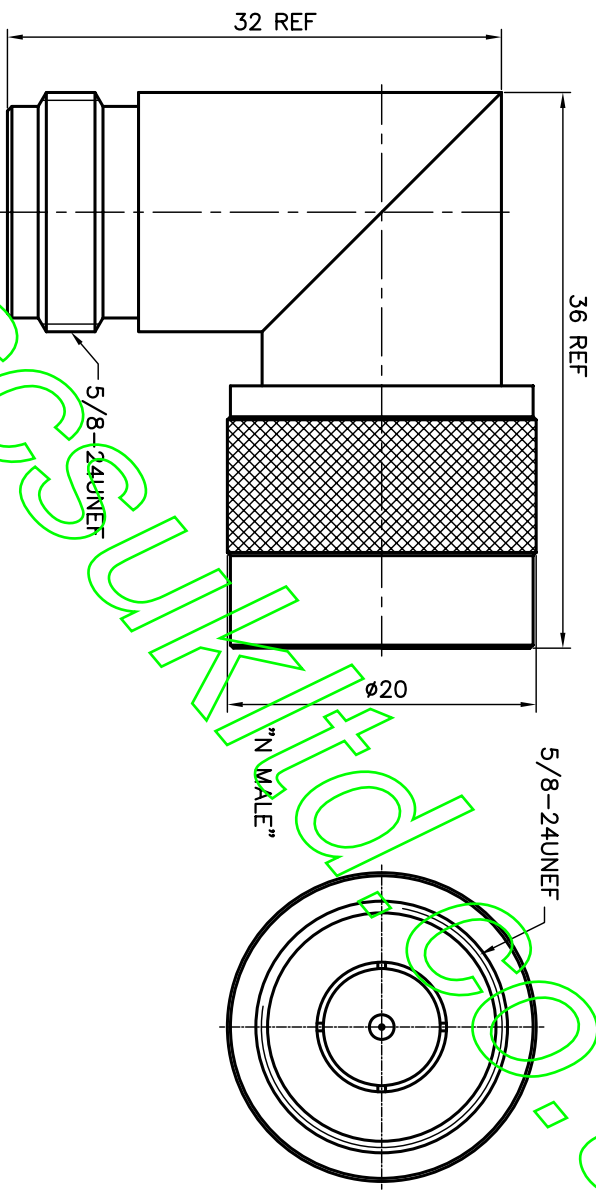

Coupling Nut Retention	100 lbs. min.
Coupling Proof Torque	30 in-lbs. min.

CONNECTORS CABLES
CHS
SPECIALISTS LTD.

TITLE: N MALE TO N FEMALE RIGHT ANGLE

PART NO: NPJRAA50

DRAWING NO:

APRD: _____
 CHKD: _____

DR: _____

DATE: 09/29/10"
 UNIT: mm

030 SHEET: .
 SCALE: 2/1

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-6	=	±0.2
>6-30	=	±0.4
>30-120	=	±0.6
>120-315	=	±1.6
>315-1000	=	±1.6
ANGLES	=	±5°

DESCRIPTION	MATERIAL	FINISH	
SHELL	BRASS	NICKEL	KA/2005/10527 \ KA/2005/60362
CONTACT PIN	BRASS	GOLD	KA/2005/10527 \ KA/2005/30993
INSULATOR	DELFIN	WHITE	KA/2005/10531
BODY	BRASS	NICKEL	KA/2005/10527 \ KA/2005/60362
			SGS REPORT NO