

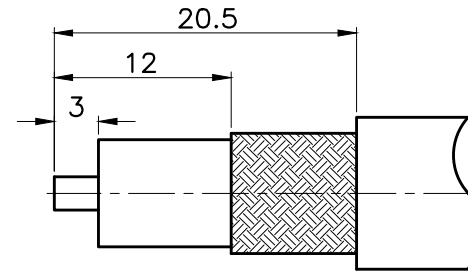
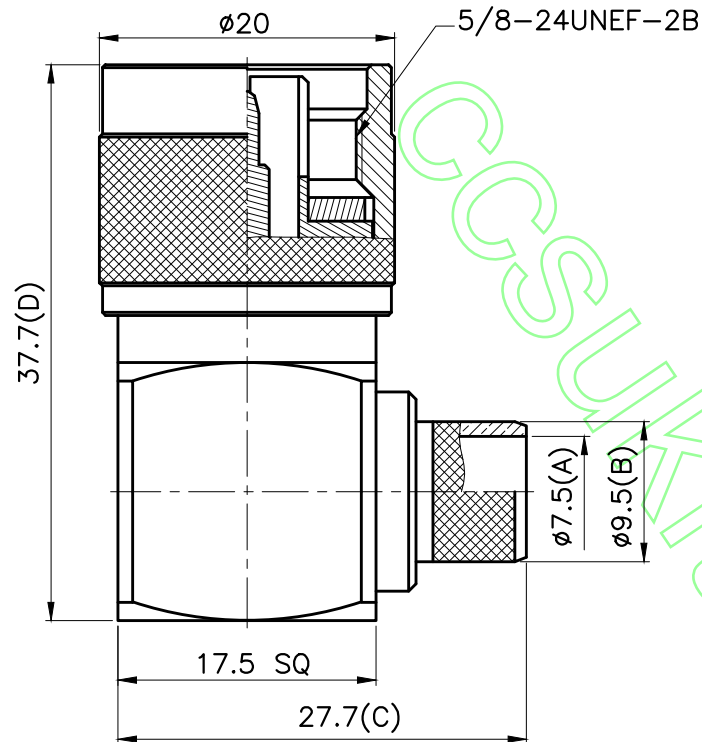


REVISIONS		
ISS	DESCRIPTION	DATE

RoHS COMPLIANT



RECOMMENDED
CABLE STRIPPING DIM'S

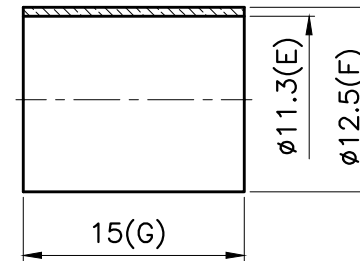

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CONTACT PIN TO SOLDER

CONNECTORS CABLES
COS
SPECIALISTS LTD.

TITLE: N MALE RIGHT ANGLE CRIMP
(FOR RG214, LMR400)

APRD: P Elwood	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 >6-30 = ±0.4 >30-120 = ±0.6 >120-315 = ±1 >315-1000 = ±1.6 ANGLES = ±5°	COVER	BRASS	NICKEL
CHKD:		FERRULE	BRASS	NICKEL
DR:		SHELL	BRASS	NICKEL
PART NO: NPRACR400	029	GASKET	RUBBER	RED
DRAWING NO:	DATE: 12/03/20"	CONTACT PIN	BRASS	GOLD
	UNIT: mm	INSULATOR	TEFLON	WHITE
	SCALE: 2/1	BODY	BRASS	NICKEL
		NO. DESCRIPTION	MATERIAL	FINISH